

## OPTIMIZATION OF WASTEWATER TREATMENT PLANT DESIGN AND OPERATION USING SIMULATION AND COST ANALYSIS

MAYARA ANUSHA\*, KOTTU.RAJESH\*\*  
PG SCHOLAR\*, ASSISTANT PROFESSOR\*\*  
GANDHI ACADEMY OF TECHNICAL EDUCATION  
(Approved by A.I.C.T.E, New Delhi Affiliated to JNTUH)  
Ramapuram(V),Chilukuru(M), Suryapet District, T.S-508206

**ABSTRACT** This paper defines an objective economic index, which integrates both investment and fixed and variable operating costs of a wastewater treatment plant. The main objective is to standardize a cost calculation procedure, to be able to compare different treatment scenarios. The development of the cost criterion may be specific to each particular case, especially to assess variable operating costs. The use of cost models and of simulation in the comparison of treatment alternatives is then illustrated through two case studies. The first simple example refers to the design phase of a plant whereas, in the second example, real time control strategies are investigated through dynamic modeling and simulation. Such investigations are likely to result in considerable savings.

**KEYWORDS** Cost criteria, design, dynamic simulation, economic optimization, wastewater treatment plant

**INTRODUCTION** When designing a new wastewater treatment plant (WWTP) or when upgrading an existing one, different treatment alternatives and operating strategies may be evaluated with the help of a cost index. However, software tools that have been developed to design cost-effective WWTP such as CAPDET (McGhee et al., 1983) or STOM (Spearing, 1987), as well as optimization studies (Tyteca, 1985; Pipyn et al., 1994; Fels et al., 1997), suffer from two major drawbacks: (i) the cost indices used are often restrictive: only investment or specific operating costs are considered; (ii) the time-varying characteristics of the wastewater are not directly taken into account but through the application of large safety factors, which induce an increase in the costs. Moreover, the use of adequate operating strategies such as real-time control is rarely investigated, despite the benefits that may be achieved (Vanrolleghem et al., 1996; Ekster, 1998). The first objective of this paper is to define an objective economic index derived from cost functions, including both investment and variable operating costs over the life span of a plant. Secondly, the advantage of using simulation as well as these costs is illustrated through two recently studied applications. In the first one, the impact on the costs of the expected maximum load used for the design of an industrial plant is investigated. In

the second one, a study supporting the choice between the implementation of different control strategies that optimize the polymer dosage to an overloaded clarifier is presented.

**OVERALL WASTEWATER TREATMENT PLANT COST FUNCTIONS** WWTP costs are in general subdivided in investment and operating costs. The latter may be fixed (normal operation and maintenance, fixed power, ...) or variable (power and chemical consumption, sludge treatment and disposal and effluent taxes). In order to assess the preliminary costs of a plant - to be able to choose between different alternatives in the early phase of a project - cost functions may be used (Wright and Woods, 1993 - 1994; Agences de l'eau, 1995; Fels et al., 1997). Investment cost functions Investment costs for major treatment plant units may be quantified as function of the process size (e.g. volume, area, flow rate) by use of power laws or polynomial functions. To estimate investment costs related to pipes or instrumentation, cost factors (percentage of the investment cost) are often applied. Examples of investment cost functions may be found in the literature (Tyteca, 1985; Wright and Woods, 1993 - 1994; Fels et al., 1997). However, when only using literature data, accurate estimation of investment costs can hardly be expected. Cost functions are indeed developed at a given time for a specific company, region or country and any extrapolation is not without risk. Moreover it is difficult to compare various relationships extracted from different sources, as the description of the components taken into account in the relationships is often poor. Finally, an indication of the accuracy obtained using literature data is rarely provided. As a result, cost analysis in the early phase of a project requires the development of specific cost functions, if accurate and reliable estimation is pursued. Results of an investigation performed for Flanders (Vermeire, 1999) are presented in Table 1. The cost functions have been developed for a typical layout of domestic WWTPs (oxidation ditch). Investment costs are expressed in Euro of 1998 and are subdivided in construction (concrete, excavation, foundation) and electromechanical equipment (purchase and installation). Taxes, administration cost and engineering cost are not considered.

Table 1 - Investment cost functions developed for municipal WWTPs in Flanders (Vermeire, 1999)

Unit	Item	Components included	Cost function	Parameter	Parameter Range
Influent pumping station + screening	C <sup>1</sup>		2334 Q <sup>0.837</sup>	Q = flow rate (m <sup>3</sup> /h)	250-4000
	EM <sup>2</sup>	Screws Screen	2123 Q <sup>0.540</sup> 3090 Q <sup>0.349</sup>		
Oxidation ditch	C	Selector, aeration tank + sludge recirculation	10304 V <sup>0.477</sup>	V = volume (m <sup>3</sup> )	1100-7700
	EM	Aeration system	8590 OC <sup>0.433</sup>	OC = oxygen capacity (kgO <sub>2</sub> /h) A = area (m <sup>2</sup> )	
Settler	C		2630 A <sup>0.876</sup>		175-1250
	EM	Rack	6338 A <sup>0.505</sup>		
Sludge recirculation	EM	Screws	5038 Q <sup>0.304</sup>	Q	35-2340
	C	Buffer tank+thickener	5559 V <sup>0.472</sup>	V	
Storage tank + Thickener	EM	sludge mechanism, pumps, ...	10093 A <sup>0.167</sup>	A	8-30
Effluent unit	EM	Venturi meter	3350 Q <sup>0.383</sup>	Q	125-2130
			6592 Q <sup>0.498</sup>	Q	
Construction			3873 Q <sup>0.772</sup>	Q	250-4000
Infrastructure			16482 Q <sup>0.383</sup>	Q	250-4000
Electricity			2438 Q <sup>0.351</sup>	Q	250-4000
Instrumentation					250-4000

<sup>1</sup> C = Construction  
<sup>2</sup> EM = Electromechanical equipment

The functions presented in Table 1 have been statistically validated and they allow to estimate the total investment cost of a plant (with a similar layout) with a maximum error of 25 %.

**Operating cost functions** Total operating cost may be related to global plant parameters (e.g. average flow rate, population equivalent), generally through power laws (Smeers and Tyteca, 1984; Balmér and Mattson, 1994; WERF, 1997). However, such relationships apply to the average performance of plants and often suffer from a high uncertainty, unless very similar plant configurations are considered. In order to take into account simulation data to estimate operating costs, deductive models may be issued from engineering calculations (Brett et al., 1998; Jacquet, 1999). However, such development requires some skill, and on-site data collection is preferable when possible (when upgrading an existing plant), in order to check and refine the cost models or to build new (inductive) models. Table 2 and 3 gather different cost functions that may be used to estimate fixed and variable operating costs. In order to avoid cost adjustment, non-monetary units (i.e. man-hour, kW) have been preferred when possible in the development of the cost functions (Balmér and Mattson, 1994).

Table 2 - Examples of fixed operating cost functions

Cost	Parameter	Cost function	Symbols and units	Reference
Normal operation and maintenance	Population Equivalent PE	L = Uc PE	L = labour, man-hour/y, Uc = unit cost, man-hour/y/PE	Jacquet, 1999
Clarifier mechanism	Area A (m <sup>2</sup> )	P = θA <sup>b</sup>	P = power, kW θ, b = constant	Fels et al., 1997
Mixers	Volume V (m <sup>3</sup> )	P = Ps V	P = power, kW Ps = specific power, kW/m <sup>3</sup>	Jacquet, 1999
Small equipment	Population Equivalent PE	C = Uc PE	C = cost, Euro/y	Alexandre and Grand d'Esnon, 1998
	Analyses	C = Uc PE	Uc = unit cost, Euro/y/PE C = cost, Euro/y	

Table 3 - Example of variable operating cost functions

Cost	Parameter	Cost functions	Symbols and units	Reference
Pumping power	Flow rate Q (m <sup>3</sup> /s)	P = Qwh / η	P = power, kW w = specific weight of the liquid, N/m <sup>3</sup> h = dynamic head, m η = pump efficiency, -	ASCE, 1992
Aeration power Fine bubble aeration	Oxygen transfer coefficient K <sub>L</sub> a <sub>0</sub> (h <sup>-1</sup> ) Dissolved oxygen concentration C (g/m <sup>3</sup> )	Q <sub>air</sub> = (K <sub>L</sub> a <sub>0</sub> Cs <sub>0</sub> /Arp <sub>02</sub> γ <sub>O<sub>2</sub></sub> ) <sup>1/(B+1)</sup> P = γ[(γ-1)P <sub>0</sub> /η] Q <sub>air</sub> - ((P <sub>0</sub> /P <sub>1</sub> ) <sup>-1</sup> ) <sup>1/2</sup> - 1 (see development in Appendix)	see Appendix	Jacquet, 1999 this study
Sludge Thickening, dewatering and disposal	Excess sludge TSS (t)	Uc TSS	Uc = Unit cost, Euro/t TSS	Alexandre and Grand d'Esnon, 1998 Jacquet, 1999
Chemicals Consumption	Consumption, Cn (kg)	Uc Cn	Uc = Unit cost, Euro/kg chemical	
Effluent taxes (organic matter and nutrient)	COD, BOD <sub>5</sub> , N, P, TSS	L=Uc (k <sub>cod</sub> N <sub>org</sub> + k <sub>nut</sub> N <sub>nut</sub> )	Uc = Unit cost, Euro/t (Q, BOD, TSS, COD) N <sub>nut</sub> = f(Q, N, P)	Vanrolleghem et al., 1996

Cost functions given in Tables 2 and 3 only illustrate possible models in their generic form. As seen in Table 2, fixed operating costs may be

related to the plant size or unit size (PE, volume, area). The assessment of variable operating costs on the basis of simulation variables and parameters requires a number of hypotheses (e.g. head losses, oxygenation efficiency, see Table 3): each particular case may thus require the development of specific cost functions. Finally, when comparing different alternatives, special attention should be paid to the time and space scales chosen (Vanrolleghem et al., 1996), as they may influence the choice of the implemented cost functions (Rivas and Ayasa, 1997). At best, an overall plant evaluation over the life span of the plant should be conducted.

**Total cost of a WWTP** The total cost of a plant is often determined using the present worth method (White et al., 1989). All annual operating costs for each process are converted into their corresponding present value and added to the investment cost of each process to yield the net present value. If ICK represents the investment cost of a unit k, and OCK the operating cost, the net present value (NPV) of a plant over a period of n years can be determined as:

$$NPV = \sum_{k=1}^N IC_k + \left( \frac{1-(1+i)^{-n}}{i} \right) \sum_{k=1}^N OC_k \quad (1)$$

Where i is the interest rate and N is the number of units. Results could also be expressed as equivalent annual worth (AW):

$$AW = \frac{i(1+i)^n}{(1+i)^n - 1} \sum_{k=1}^N IC_k + \sum_{k=1}^N OC_k$$


On the basis of functions, such as presented in Tables 2, 3 and 4, an overall cost index may be formulated as the NPV or the AW.

## WASTEWATER TREATMENT PLANT OPTIMIZATION USING SIMULATION

**Optimization of Plant Design – Steady state simulation** In the design phase of an industrial treatment plant, two sets of expected maximum loading rates (maximum conditions 1 and 2) have been considered to design an activated sludge process with biological nitrogen removal. Two reactor sizes have thus been determined and the investment cost of the larger plant has been estimated to be 5 % higher. For both designs, the impact on the costs of the nitrogen concentration in the effluent was assessed through simulation. The aim was, firstly, to assess the ability of the smallest design to treat the maximum loading rates (maximum conditions 2) to a given effluent quality and, secondly, to compare the cost of the two alternatives for average and maximum loading rates (maximum conditions 2). Simulation results using the WEST++ simulator (Hemmis NV, Kortrijk, Belgium, <http://www.hemmis.be>; Vangheluwe et al., 1998) showed that for both sizes investigated, the required effluent quality is reached. The impact

of the influent characteristics on the costs is illustrated in Figure 1. In this Figure, the costs are compared to the net present value of design 1 on average conditions (set to 100).


Figure 1 - Impact of the influent characteristics on the net present values

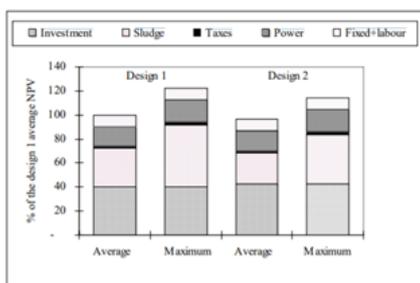

The increase in cost observed for both designs when subjected to the maximum load can mainly be attributed to an increased sludge production when the loading rates are increased. The net present value for design 2 is lower than the one for design 1, the increase in the investment cost being compensated by a decrease of the operating cost (mainly the sludge production). Finally, it seems more economical to build a larger plant, especially if maximum loading rates are reached (NPV decreased by 7 %).

Figure 2 shows the cost breakdowns for the two designs and for the two loading conditions.

Figure 2 - Cost breakdowns

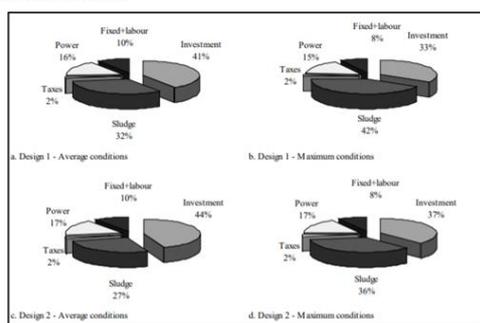

Whatever the loading rate, the cost breakdown is in agreement with literature data (Vanrolleghem et al., 1996): sludge treatment and disposal represents the main operating cost, followed by the power consumption. These variable operating costs together are of the same order of magnitude as the investment cost. This simple case study illustrates the possibility of an economic analysis coupled with simulation. The next step would consist in integrating the dynamics of the wastewater characteristics in the analysis. This would however require the assessment of the dynamic parameters of the models, uneasily determined in the design phase of a project. However, one can envisage to couple this analysis with pilot experiments, usually performed when designing an industrial WWTP. This would certainly reduce the time required to investigate different scenarios in the pilot plant, and thus would result in significant cost savings.


**OPTIMIZATION OF PLANT OPERATION – Dynamic simulation** To improve the effluent quality of an industrial plant (aeration tank + clarifier), in which the sludge settling properties

were enhanced by continuous addition of polymer at a fixed rate, Vanderhasselt et al. (1999) tested several control strategies. These strategies were based on different measured variables and polymer dosing, and have been evaluated in a WWTP simulator (West++, Hemmis NV) by subjecting them to the same hydraulic and solids loading rates. To this aim, a full-scale data set of on-line effluent flow measurements and off-line sludge concentration measurements in the aeration basin were used. The rectangular clarifier was modeled one-dimensionally by 10 horizontal layers over which the solids fluxes were calculated. For the calculation of the settling fluxes a modified Vesilind model was used, incorporating the influence of the polymer. Experimental results led to Equation (3), obtained by regression:


$$V_s = 10.59 * e^{-\frac{X}{134P+25}} \quad (R^2 = 0.82) \quad (3)$$

where:  $V_s$  = settling velocity (m/h)  
 $X$  = biomass concentration (kg/m<sup>3</sup>)  
 $P$  = polymer concentration (ppm)

With this model, Vanderhasselt et al. (1999) showed that keeping the sludge blanket height (SBH) below 1.5 m leads to an effluent suspended solids concentration below 10 g/m<sup>3</sup>. Once above this height the effluent solids concentration increases rapidly. Consequently, different control strategies were formulated to maintain the sludge blanket height below this critical level. The sludge blanket height itself, the flow rate, the solids loading and the sludge volume loading were considered as input variables to the control algorithm. Control strategies based on a combination of the SBH and one of the other measured variables were also taken into consideration. It was observed that strategies exclusively based on the flow rate require much more polymer than the other strategies to obtain the predetermined performance level (see examples in Figure 3). Still, although the other control strategies were equally effective, a clear difference could be found in their dosing pattern. Strategies using SBH show a more irregular dosing pattern while strategies that do not contain the SBH feedback component maintain a smoother behavior. Figure 3 - Evolution of the sludge blanket height (m, left) and polymer dosing rate (m<sup>3</sup> /h, right) as function of time for different control strategies (simulation results).

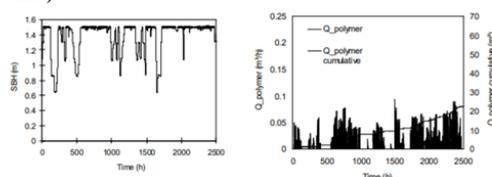

a. Control law:  $Q_{pol} = 4.1 * (SBH - 1.5)$

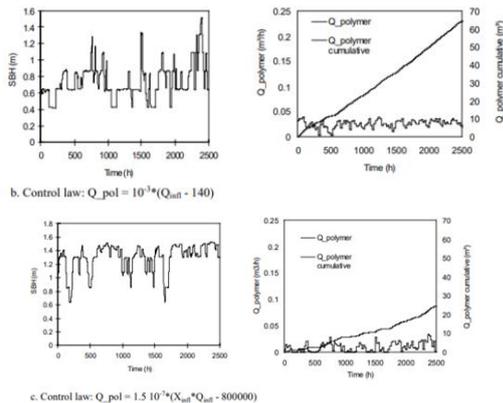

Practically, due to a strong density current that exists in the actual clarifier, the blanket height has to be kept below 0.5 m to achieve good effluent quality. Simulation results show that a feedback control keeping the sludge blanket height below this value allows to reduce the current polymer consumption up to 10 times compared to current constant dosing rates. Estimating the additional cost of the sensor and control system at 17000 Euro, the payback period of the control system would be less than 3 months.

**CONCLUSION** When optimizing the design and operation of a plant, the definition of a standardized cost criterion is required to compare different treatment scenarios. The integration of variable operating costs in the overall assessment of new approaches is likely to result in considerable savings, especially when real-time control strategies are investigated by dynamic modeling and simulation. Currently, considerable efforts are devoted to directly implement the presented cost functions in a software tool, in which the design of a plant and the dynamic simulation of its behavior are evaluated simultaneously. Further research will focus on the integration of non-monetary optimization objectives in the performance index, such as plant flexibility or the risk of failure.

#### REFERENCES

- Agences de l'eau, Ministère de l'Environnement. (1995). Approche technico-économique des coûts d'investissement des stations d'épuration. Cahier technique, 48p. (in French)
- Alexandre, O. and Grand d'Esnon, A. (1998). Le coût des services d'assainissement ruraux. Evaluation des coûts d'investissement et d'exploitation. TSM, 7/8, 19-31. (in French)
- ASCE (1992) ASCE Standard measurement of oxygen transfer in clean water. American Society of Civil Engineers.
- Balmér, P. and Mattson, B. (1994). Wastewater treatment plant operation costs. Wat. Sci. Tech. 30(4), 7-15.

- Brett, S. W., Morse, G. K., Lester, J. N. (1998). Operational expenditure in the water industry (I) : A methodology for estimating variable costs at an advanced water treatment works. European Water Management, 1(5), 31-38.
- Ekster A.(1998). Automatic waste control. Wat. Env. Techn., 10 (8),63-64.
- Fels, M., Pintér, J., Lycon, D. S. (1997). Optimized design of wastewater treatment systems: Application to the mechanical pulp and paper industry: I. Design and cost relationships. Can. J. Chem. Eng., 75, 437-451.
- Jacquet, P. (1999). Een globale kostenfunctie voor tuning en evaluatie van op respirometrie gebaseerde controle algoritmen voor actiefslibprocessen. Engineers Thesis. Faculty of Agricultural and Applied Biological Sciences. University Gent, Belgium. pp. 122. (in Dutch)
- McGhee, T. J., Mojgani, P., Viicidomina, F. (1983). Use of EPA's CAPDET program for evaluation of wastewater treatment alternatives. J. Water Pollut. Control Fed., 55(1), 35-43.