

ANALYSIS OF FUEL INJECTION NOZZLE FOR BETTER PERFORMANCE AERO ENGINES

¹SHAIK KARIM BASHA, ²D.R.SUBBA RAO, ³P.HUSSAIN, ⁴Dr.P.MALLIKARJUNA REDDY

¹M.Tech Student, ²Assistant Professor, ³Associate Professor, ⁴Professor
DEPARTMENT OF MECHANICAL ENGINEERING
SVR Engineering College, Nandyal

ABSTRACT:

Fuel injection is the most important part of the fuel injection system that is the coronary heart of the diesel engine. The fuel injection works under the very terrible conditions, exchange liquid load, mechanical load and thermal load included, over extended time period. The fuel injector is playing essential function in engine combustion. So in this fuel injector nozzle is spraying the gas into combustion at high pressure bar. Right here we are making small modifications within the nozzle The diameter of nozzle is having very small in micro stage holes so right here we are converting these micro stage holes into Nano degree holes in order that the overall performance within the injection of fuel into engine might be differ from the micro holes, so that the fuel performance and NOx reduction from the engine could be decreased And the fuel injector is taken from the dual cylinder engine of a tractor, so on this we more often than not want the nozzle and its dimensions and the holes dimensions are referred to for designing the nozzle. The fuel injection nozzle comes under the function of the high pressure of the fuel even as the fuel injector is injecting, even as the pressure of the fuel within the fuel injection may be very low when the injection is give up. The liquid load the fuel injection receives is trade. The needle valve moves upon the valve seat periodicity while the injector is running generally which means the mechanical load the fuel injection endures is variable Under long term exposure to the high-temperature fuel inside the cylinder, the temperature of the external surface of the gas injection continually reaches up to 200-300 now and again even higher. It is obviously significant to analysis the fatigue strength of the fuel injection running under the coupling of quite a few complicated and alternating load. In this project we

can create a fuel injector model in CATIAV5 software premium 2014 with widespread dimensions. And we can carry out a fatigue analysis at the fuel injector model in CATIAV5 software By this we can recognize the failure criteria of the version against the excessive electricity loads. Failure standards are being calculated according to the obtained factor of safety

I. INTRODUCTION

A modern -edge aero engine is able to running efficiently with low exhaust gas emissions over a extensive working range. This is thanks to strategies which encompass turbocharging, EGR, charge air cooling and a complicated fuel injection process. The fuel injection procedure is important for the combustion and emission formation within the aero engine. The gas injector has to atomize and vaporize the gas as it is injected. Sooner or later of the combustion the emission formation has to be saved to a minimal. Very strong pressure are determined in a modern-day aero injection nozzle; this reasons cavitation to arise inside the nozzle holes. The impact of cavitation on flow parameters together with the numerous discharge coefficients is discussed. The prevalence of cavitation enables the spray split and it can maintain the nozzle holes unfastened from deposits. Immoderate quantities of cavitation can lead to hole erosion and for that reason impact the long time operation of the nozzle in a terrible way. Whole erosion in addition to different mechanisms can cause hollow to hollow variations in gasoline spray impulse, mass waft, penetration etc. This is a completely crucial trouble in any low emission diesel engine, in particular in the course of transients, as less than gold standard conditions ought to be treated. The have an effect on of hollow to hollow variation on fuel consumption and emissions isn't always very

widely recognized and this thesis contributes to the sector. As part of these paintings a fuel spray momentum dimension device turned into evolved and tested. Any automobile engine desires so as to perform brief transitions between one-of-a-kind loads and speeds, so called transients. In a turbocharged diesel engine with EGR problems associated with the turbocharger and the EGR circuit arise. A diesel engine has to run with a air excess for you to acquire complete combustion with low emissions of soot. Whilst turbocharging is used the turbocharger turbine makes use of some of the exhaust enthalpy to force the faster compressor, on this way the engine is supplied with improve strain. So as for the engine and turbocharger to function on the higher load and consequently better mass waft fee the turbocharger has to growth its rotational velocity and the floor temperatures must settle at a brand new thermodynamic country. Both of those strategies take time and in the course of this time the combustion manner may additionally need to continue beneath less than foremost occasions due to the low boost pressure

Nozzle is the component of a Missile, Rocket or air-breathing Engine that Produces thrust. Converting the thermal energy of the recent Chamber gases into Kinetic power and directing that electricity alongside the Nozzle axis, as illustrated under, accomplish this.

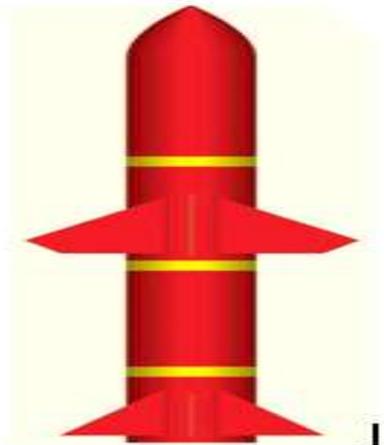


Figure.1. nozzle

The propellant consists of a fuel, typically liquid hydrogen (H₂), and an oxidizer, usually liquid oxygen (O₂). The propellant is pumped into a combustion chamber at some rate (m) in which the gas and oxidizer are blended and burned. The exhaust

gases from this method are pushed into the throat region of the nozzle. For the reason that throat is of less go-sectional place than the rest of the engine, the gases are compressed to a high stress. The nozzle itself regularly will increase in cross-sectional region allowing the gases to extend. Because the gases accomplish that, they push in opposition to the partitions of the nozzle growing thrust.

Mathematically, the ultimate purpose of the nozzle is to extend the gases as efficaciously as viable on the way to maximize the exit speed (v_{exit}). This system will maximize the thrust (F) produce by way of the system since they are immediately associated with the aid of the equation

EXPANSION AREA RATIO:

In theory, the simplest crucial parameter in missile nozzle design is the growth place ratio (ϵ), or the Expansion area ratio (A go out) to throat location (A Throat). Fixing all other variables (often the chamber strain), there exists most effective one such ratio that optimizes universal system performance for a given altitude (or ambient pressure).

However, a missile commonly does not tour at only one altitude. Therefore, an engineer has to be aware about the trajectory over which a missile is to tour in order that an growth ratio that maximizes performance over a number ambient strain may be decided on.

Nevertheless, other factors must also be considered that tend to alter the design from this expansion ratio-based optimum. Some of the issues Designers must deal with area nozzle weight, length, manufacturability, cooling (heat transfer), and aerodynamic characteristics.

MATERIAL:

As the nozzle is important component of the missile. Fabric used to manufacture nozzle must possess excessive energy, high temperature resistant, top resistant. The nozzle additives are made from 18 Ni Merging steel 250 (ASTM A579 Code 72). This cloth used in annealed situation to gather excessive strength, accurate machinability and withstand the immoderate temperature. Design consideration

DESIGN CONSIDERATION:

Nozzle consists of three parts they are:

- Nozzle End dish

- Nozzle neck
- Nozzle cone

Nozzle end dish is fixed to combustion chamber (schematic diagram of missile is shown in figure-1). So the left end of the Nozzle end dish is constrained i.e., translation and rotational movements are arrested ($u_x=u_y=u_z=0$).

PROBLEM SPECIFICATION:

Nozzle is attached to combustion chamber. It exerts high pressures and temperature. So to detect the weak the component and reduced the stress caused by these pressures. The total problem is concentrated at the critical part is the nozzle end dish.

PRINCIPLES OF AERO PROPULSION:

Aero propulsion is A practical application of Sir Isaac Newton's third law of motion which states that, 'for each pressure acting on a frame there may be an opposite and identical reaction'. For plane propulsion, the 'body' is atmospheric air this is induced to accelerate because it passes through the engine. The pressure required to provide this acceleration has an equal impact within the contrary path acting on the apparatus generating the acceleration. A jet engine produces thrust in a similar manner to the engine/propeller combination. Both propel the plane by using thrusting a big weight of air backwards one within the shape of a big air slipstream at comparatively low pace and the other within the form of a aero of gasoline at very high velocity. This identical precept of reaction takes place in all varieties of motion and has been usefully carried out in many methods. The earliest regarded example of jet response is that of Hero's engine produced as a toy in 120 B.C. This toy confirmed how the momentum of steam issuing from some of jets should impart an same and contrary reaction to the jets themselves, as a result causing the engine to revolve. The familiar whirling lawn sprinkler is a extra sensible instance of this principle, for the mechanism rotates by means of distinctive feature of the response to the water aero. The high stress jets of contemporary firefighting equipment are an instance of 'aero reaction', for often, because of the response of the water jet, the hose cannot be held or controlled by means of one fireman. Possibly the simplest illustration of this precept is afforded by using the carnival balloon which, whilst the air or gas is released, rushes hastily away within the path opposite to the jet.

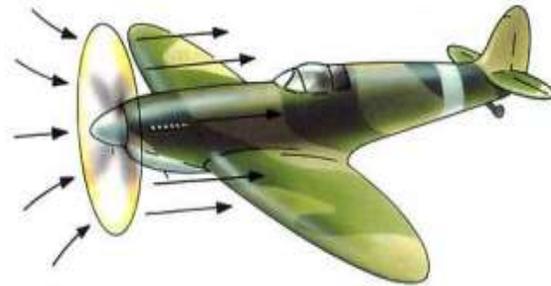


Figure: 2. Propeller and aero engine propulsion

Aero engine propulsion engine, whether rocket, athodyd, or turbo-jet, is a piece of apparatus designed to accelerate a stream of air or gas and to expel it at high velocity. There are, of course, a number of ways

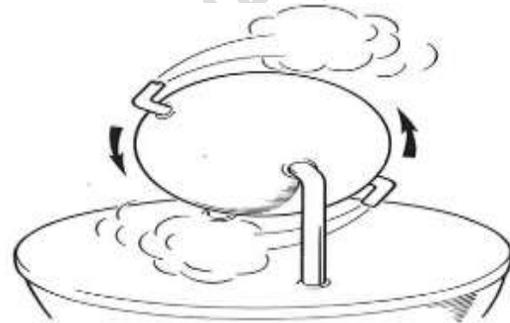


Figure:3. Aero engine - probably the earliest form of jet reaction

II.LITARATURE REVIEW

[1] Z. Beefing, A.M. Gomes (2000) the most important, difficulty with the diesel engines, due to gas distribution is non-uniform, and this reasons the combustion combination non-stoichiometric. Consequently, the combustion manner inside the DI diesel engine is heterogeneous in nature. It reasons the increase the emissions air. Liquid gas is injected through the nozzle via the gas injection system into the cylinder via the cease of compression stroke. The liquid jet leaving the nozzle becomes turbulent and spreads out as it entrains and mixes with the in-cylinder air. The outer surface of the fuel jet breaks up into droplets. The preliminary mass of gas will evaporates first thereby generating a gasoline vapor-air combination. Large droplets offer a higher penetration however smaller droplets are needful for quicker mixing and evaporation of the fuel. The sprayed fuel movement encounters the resistance from the dense in cylinder fluids and breaks into a spray. Further they vaporize and mix with compressed high temperature and high stress in-

cylinder fluids. At this stage the in cylinder fluids have above the self-ignition temperature of the fuel.

III.METHODOLOGY

Aero engines performance and emission characteristics are largely governed by fuel atomization, That is definitely depend on the internal flow of nozzle injector.. Fuel is injected in the cylinder at a very high pressure to improve the atomization and spray conduct of the fuel. Throughout the flow in injector the pressure electricity of the fuel receives transformed into the kinetic energy on the value of pressure energy. Due to the enormous fall within the pressure at the Inlet of the nozzle injector, cavitation phenomena occur. As we float toward the exit of the nozzle the cavitation phenomena decreases Cavitation can enhance spray breakup and enhances the overall performance of diesel injector systems. Additionally, development inside the overall performance of the combustion procedure is one of the advantages. A nicely-designed fuel injector facilitates in making sure short and entire combustion. With the assist of proper atomization of the gas into very tiny droplets, the floor region of the droplets increases. Therefore, better blending of air and fuel is achieved and consequently, subsequent combustion Atomization is the manner of pressurizing the fuel across a mini aperture.

Jet Fuel Thermal Stability:

While jet fuel is an effective cooling medium, its heat sink abilities are restrained, in the main by way of the belongings referred to as thermal stability. When fuel is heated to excessive temperatures, which is known as being thermally stressed, chemical reactions take location in the gas that spoil it down and shape stable precipitates that are finally deposited onto the partitions of the fuel traces in a method called coking. If left unchecked, this may not simplest bring about severe harm to engine additives, however additionally reduce the effectiveness of heat transfer in the heat exchanges between the gasoline and engine components

High Temperature Materials and Their Requirement:

Recent developments in nuclear power, jet aircrafts, ballistic missiles and rocketry have increased the demand for materials that have good corrosion resistance, strength characteristics and particularly, creep resistance at high temperatures.

High temperature use of materials can give rise to several problems such as:

Accelerated oxidation and/ or corrosion

- Creep
- Grain boundary other weakening
- Allotropic and other phase changes
- Modification of conventional properties

Therefore, the material for high temperature use must be such that it can withstand these difficulties and perform its functions satisfactory during service. The nozzle components are made of 18 Ni merging steel 250 This material used in annealed condition to acquire high strength, good machinability and resist the high temperature. The composition used for this material

IV.EXPERIMENTAL SETUP:

The experiment in particular contains the existing fuel injector handiest modal no DSLA146p994 which is used inside the aero engines .And this gas injector nozzle having 5 holes had been as in micro stage and its hollow dimensions approximately 0.2mm and its ordinary injector diameter is -0.262 and pressure on the -240bar,spray angle is -14, material used is steel. So right here we're designing the nozzle holes in Nano length with the aid of using the CATIAV5 software program. Right here first we are going to design a nozzle that is already existed and the hole diameter can be design in Nano size hollow and after designing in Ansys we are able to take a look at the stresses and loads effecting in nozzle, then the fuel nozzle is analysis the gas glide stress pace and spray perspective it offers the end result of nozzle float through the cfd software. And then fabrication procedure could be accomplished in the stay task. The substances used to fabricate the nozzle are steel and Nano length holes can be completed with laser generation. The whole size is modified into 0.1mm after which after fabrication the nozzle is at once taken for checking out the fuel injector performance in engine. And before used nozzle is having the parameters like pressure bar and perspective of spray the entirety is modified hence then we are able to growth the pressure bar up to 2000 and above then gas spray angles changed then tested the performance of the gas injector nozzle in Nano length holes. This experiment is especially finished for the evaluation of fuel injector nozzle in Nano size. This Nano length

holes are taken due to making use of the nanotechnology inside the motors additives. So right here we've got taken the gas injector nozzle for the application. This is carried out for gas efficiency and as well as NOx reduction in the engine. These are the some of techniques were used for doing this experiment, and additionally we can note some of the parameters effecting the combustion in engine and some variations in pollutants by way of NOx discount.

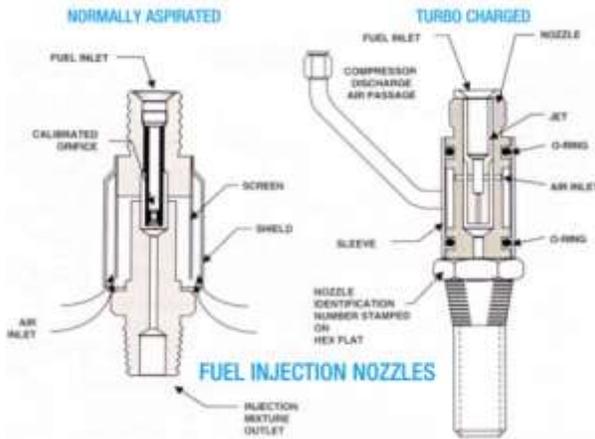


Figure:4.Fuel inject aero nozzle

METHODS OF AERO ENGINE PROPULSION:

The types of aero engine, whether or not ram jet, pulse jet, rocket, gas turbine, turbo/ram jet or faster-rocket, fluctuate handiest within the way wherein the 'thrust company', or engine, materials and converts the power into energy for flight The ram jet engine is an athodyd, or 'aero-thermodynamic-duct to give it its complete name. It has no main rotating components and includes a duct with a divergent access and a convergent Jet propulsion is the propelling force generated inside the path opposite to the float of a mass of fuel or liquid under pressure. The mass escapes through a hollow or commencing called a jet nozzle. The nozzle increases the velocity of the water, giving the term, a jet of water another instance of the idea of jet propulsion is an inflated balloon. With the opening in the balloon closed there is no movement because the stress of the gas inside the balloon is same in all guidelines. Whilst you allow the outlet to release the air the balloon movements Its movements appear to be in all directions. However, it is always moving in the opposite direction from the open end where the air is exiting.

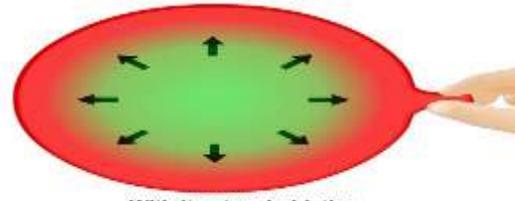


Figure:5.Balloon example of restricting jet propulsion

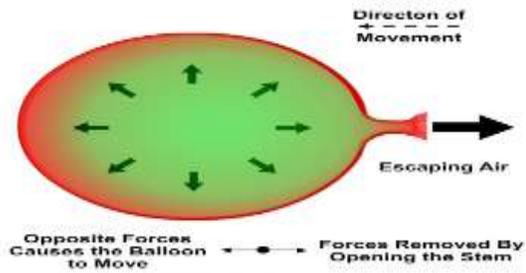


Figure:6.Balloon example of jet propulsion theory

The quantity of warmth you may add is essentially dependent upon the strain of the air treated. A simple approach of elevating the strain is to bypass the air through a DIVERGENT access nozzle. A divergent entry nozzle converts gaseous electricity from velocity to strain and temperature. This additionally gives a ahead strain wall for the jet to react. A CONVERGENT go out nozzle converts gaseous energy from stress and temperature to velocity. The simple fuel unit created has little sensible use due to the following:

- Air compression depends solely on ram effect.
- A limited amount of heat is added
- Considerable heat is lost by radiation

The next step is to improve the method of adding heat, through internal combustion shows a divergent-convergent duct. Fuel is injected and burned, releasing heat directly into the airstream. This simple "Aero Thermo Dynamic Duct

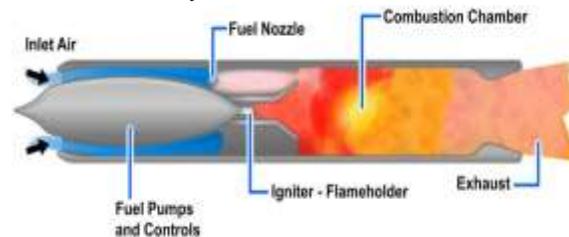


Figure:7.Aero jet engine structure

Aero engine operating conditions:

The nozzle characterization under sensible motor task conditions was gone for delivering reference information for CFD dissipation display approval. In the analysis the rail weight, fuel temperature, and the gas weight and temperature in the chamber were acclimated to the proportionate motor working conditions. Spray perception test was done utilizing the accompanying single part fills and their blends: n-hexane (high instability), iso octane (center unpredictability), n-decane (low instability), a two segment fuel blend signified by mixture2 (72.05% nhexane, 27.95% n-decane) and a three-segment fuel blend meant by mixture3 (35% n-hexane, 45% iso octane, 20% n-decane) The sythesis of the fuel blend is characterized with the end goal that the breaking point coordinates the center purpose of the typical gas fuel boiling bend keeping in mind the end goal to analyze their capacity of being utilized as model fuel to speak to the genuine gas fuel for numerical reproduction. What's more, try was likewise performed for ordinary gas fuel, ethanol and E 85. Some spray perception comes about under the stratified full load activity condition are shown in Figs. 10-11, where P rail = 200 bar, T fuel = 70 °C, P chamber = 15 bar, and T chamber = 200 °C. The infusion time is 0.225 ms for all cases.No visualization is presented for the n-hexane spray, since the spray is almost not visible at t=1 ms after the injection start for its fast evaporation process.

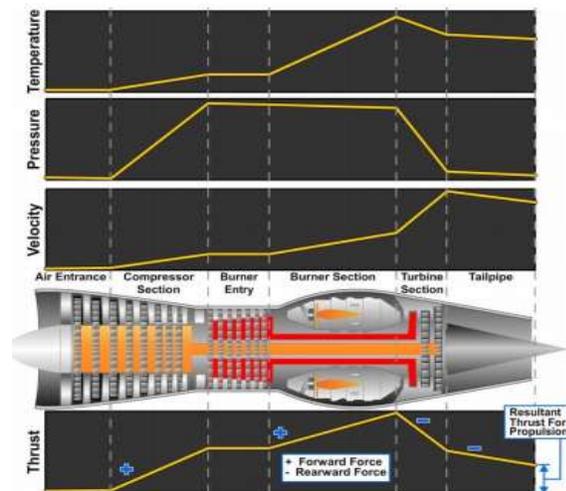


Figure:7.Effects on airflow through an engine
INTRODUCTION TO ANSYS:

The ANSYS program allows engineers to construct computer models or transfer CAD models

of structures, products, segments, or frameworks, apply loads or other plan execution conditions and concentrate physical reactions, for example, feelings of anxiety, temperature circulation or the effect of lector attractive fields In a few situations, model testing is unfortunate or outlandish. The ANSYS program has been utilized as a part of a few instances of this write including biomechanical applications, for example, high substitution intraocular focal points. Other delegate applications run from substantial hardware parts, to an incorporated circuit chip, to the bit-holding arrangement of a constant coal-mining machine. ANSYS outline improvement empowers the designers to decrease the quantity of exorbitant models, tailor unbending nature and adaptability to meet targets and locate the correct adjusting geometric alterations. Aggressive organizations search for approaches to deliver the most noteworthy quality item at the least cost. ANSYS (FEA) can help essentially by diminishing the plan and assembling costs and by giving architects included trust in the items they outline. FEA is best when utilized at the reasonable plan arrange. It is likewise valuable when utilized later in assembling procedure to confirm the last plan before prototyping.

INTRODUCTION TO CATIA:

CATIA started as an in-house development in 1977 by French aircraft manufacturer Anions Marcel Assault, at that time customer of the CADAM software to develop Assaults Mirage fighter jet. It was later adopted in the aerospace, automotive, shipbuilding, and other industries. PC Aided Three dimensional Interactive Application (CATIA) is outstanding programming for 3-d planning and displaying for complex shapes. Usually alluded to as a3D Product Lifecycle Management programming suite, CATIA underpins various phases of item improvement (CAX), including conceptualization, outline (CAD), building (CAE) and assembling (CAM). CATIA encourages shared building crosswise over orders around its 3DEXPERIENCE stage, including surfacing & shape outline, electrical, liquid and electronic frameworks plan, mechanical designing and frameworks building. CATIA encourages the outline of electronic, electrical, and circulated frameworks, for example, liquid and HVAC frameworks, the

- The number of elements used in this meshing is 71441 and the number of nodes is 122228. In this process regular type of meshing is done to analyse the process.
- Using the working condition of the coupling a relative rotational movement between the shafts comes into picture consequently.
- The determination of the shear stress along the contact region is essential. So, the model is meshed and then analysed to get the detail and authentic result of the stresses of the contact region.

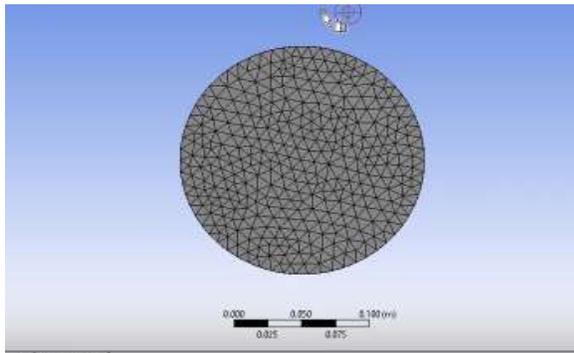


Figure:15.Droplet nozzle top view

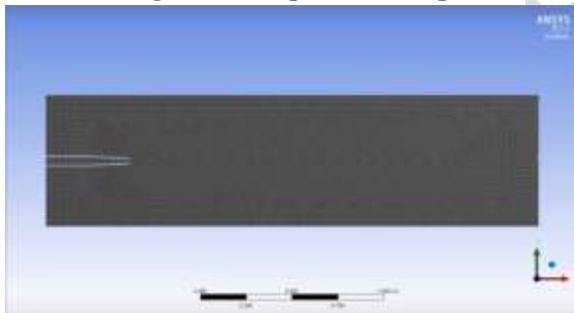


Figure:16. multi hole spray flash meshing model

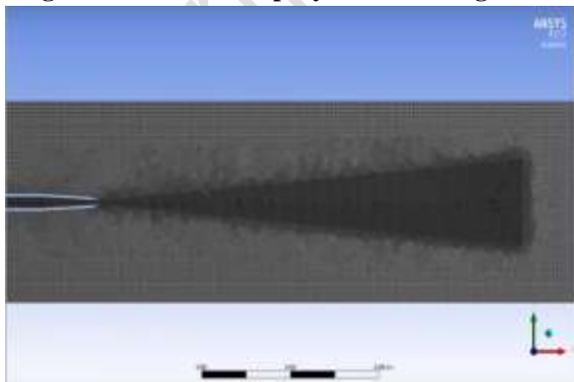


Figure: 17.heavy flow multi hole spray flash meshing model

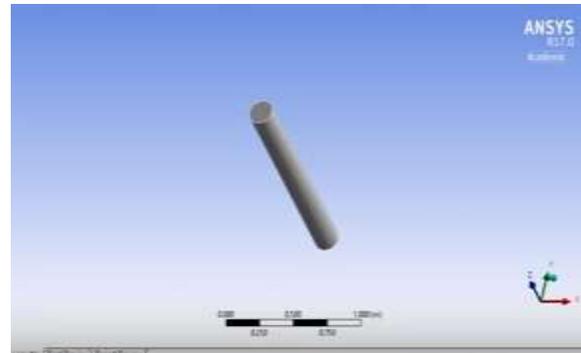


FIGURE:18.SPRAY FLASH DROPLET INITIAL VIEW

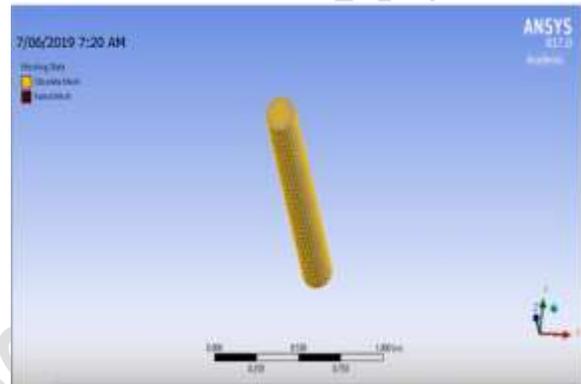


FIGURE:19.SPRAY FLASH DROPLET MESHED STATE

V.RESULTS

Nozzles are available a selection of shapes and sizes depending on the mission of the Aero engines, this is very important for the understanding of the performance characteristics of rocket. Convergent divergent nozzle is the maximum commonly used nozzle due to the fact that in the usage of it the propellant can be heated in combustion chamber. In this assignment the nozzle converting the exceptional nozzle parameters and one of a kind fluids at exceptional velocities

Injection Rate Measurement:

The realized injection rate is one of the key enter parameters for spray and typical combustion simulation. For the investigated multi-layer nozzles, where the nozzle holes are arranged on an top and a lower row, the general injection rate isn't always enough to explain the nozzle behavior as it can't be assumed that the injection charge is similar for holes of the upper and lower row. Especially for nozzle standards with various hollow-diameters for higher and decrease row and throughout the needle beginning segment a widespread difference in injection fee may be anticipated. In order to research

the effect of multi layer nozzle ideas on spray propagation, the decrease chamber of the injection price size device is connected to an injection rate analyzer with excessive resolution information logging talents and a precise fuel mass size. A contrast of injected gas mass via higher and lower nozzle layer



Figure:20.Sector mesh for 3D CFD Simulation Model

Fatigue analysis:

The fatigue phenomenon shows itself in the form of cracks developing at particular locations in the structure. Cracks can appear in diverse types of structures such as: planes, boats, bridges, frames, cranes, overhead cranes, machines parts, turbines, reactors vessels, canal lock doors, offshore platforms, transmission towers, pylons, masts and chimneys. The fatigue life of a member or of a structural detail subjected to repeated cyclic loadings is defined as the number of stress cycles it can stand before failure. Depending upon the member or structural detail geometry, its fabrication or the material used, four main parameters can influence the fatigue strength



Figure:21. Final view of aero nozzle

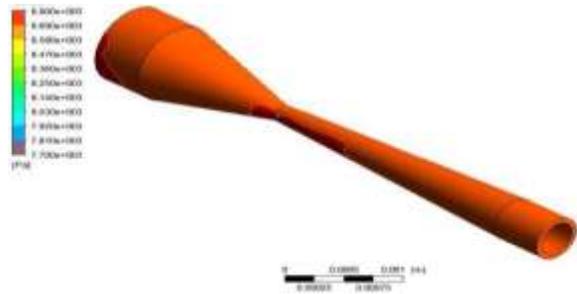


Figure: 22.nozzle total deformation

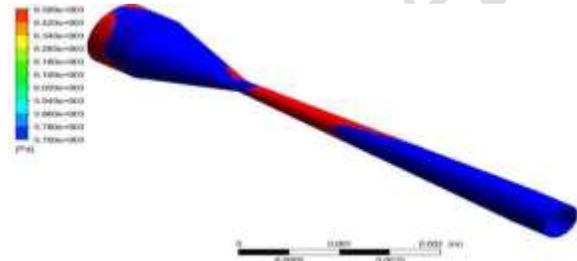


Figure:23.von-mises stress

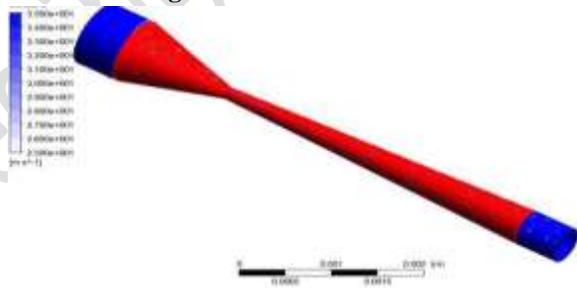


Figure:24.Shear strain



Figure:25.Equivalent elastic strain

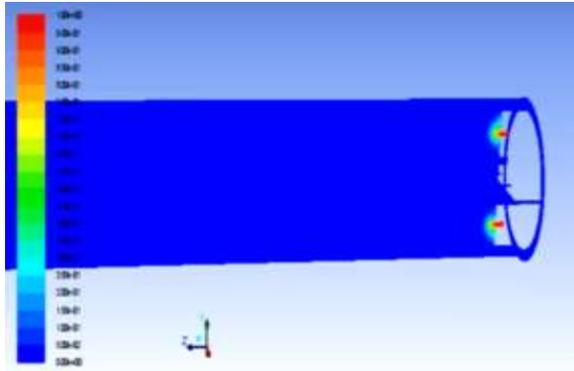


FIGURE: 26.COUNTER OF MASS FRICTION

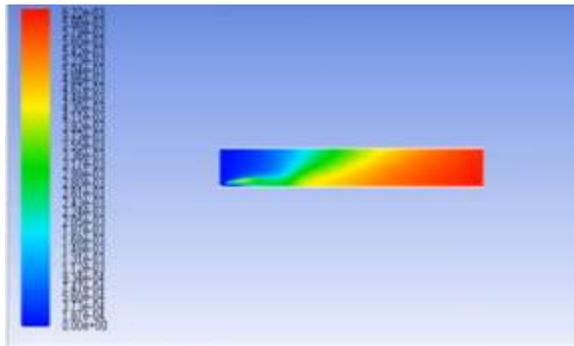


FIGURE: 27.MASS FRICTION POLLUTANT VIEW


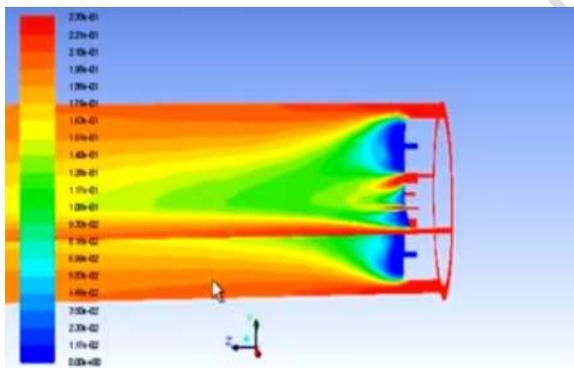


FIGURE: 28.COUNTER OF MASS FRICTION 2
Table 4.1 fuel injection aero engine nozzle analysis different variations

parameters	maximum	Minimum
total deformation	8.800e+003	7.700e+003
von-mises stress	6.500e+003	5.700e+003
shear stress	3.500e+001	2.500e+001
Equivalent elastic strain	1.200e+002	7.000e+001

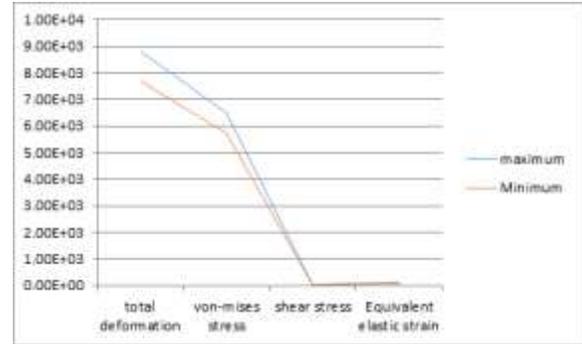

Graph: 4.1 aero engine nozzle analysis different variations

VI.CONCLUSION

The fuel injector without delay injects gas into the direct fuel injection device. The injector is a very complicated component, and big research has been carried out to improve it. In my work indicating the development of fuel injector device to lessen chocking trouble that's generally take place in bio diesel engine. The injection nozzles and their respective nozzle holders are vitally vital additives located between the in-line injection pump and the diesel engine, its features are as metering the injection of gas, control of the gas, defining the fee-of-discharge curve, Sealing-off in opposition to the combustion, chamber By observing the CFD analysis of diesel engine nozzle the stress, velocity, heat switch price and mass waft fee values are will increase through increasing the inlet velocities and lowering the nozzle dia. So it could be concluded the aero engine nozzle efficiency have been more even as the nozzle dia. Decreases. Upgrades inside the fuel injection structures of internal combustion engines can substantially lessen the emission of harmful pollution. The fuel injection machine produces the spray, which directly affects the combustion of the gasoline, which in turn determines the production of pollution. But, the information of this causal relationship remains unclear. The goal of this project is to understand the flow inside fuel injector nozzles and the implications for the downstream spray

REFERENCES:

- [1] Z. Beefing, A.M. Gomes (2000) Modeling Superheated Fuel Sprays and Vaporizations. Diary of Engine Research, Vol. 1, No. 4, pp. 321-336,
- [2] L. Allocca, G. Vijaya Kumar Reddy (2012), "Impact of Fuel Injection stress on performance of Single Cylinder Diesel Engine at one-of-a-kind

intake Manifold tendencies”. International Journal of Engineering and Innovative Technology, Vol. 2(4), pp 20-28.

[3] Kasianantham Nanthagopal (2011), “Effect of the injection pressure on the internal flow characteristics for diethyl and dimethyl ether and diesel fuel injectors.” Center for Excellence in Automotive Technology, Vol. 15(4), pp 1123-1130.

[4] Chang Sik Lee (2008), “Effect of cavitation in nozzle orifice on the diesel fuel atomization characteristics, International Journal of Heat and Fluid Flow”, Vol. 29, pp 1001–1009.,

[5] Zhou, D. M. Ziang, Z. H. Huang (2000), “Study on the performance and emission of a compression ignition engine fuelled with dimethyl ether,” Proceedings of the institution of mechanical engineers Part D Journal of Automobile Engineering, Vol. 214, pp 101-106.

[6] Karan Kumar, Subrata Kr. Ghosh, (2013) “ Mine ventilation in a board and pillar mines using CFD”, International Journal of Emerging Technology and Advanced Engineering, Vol. 3(3), ICERTSD 2013, pp 389-393

[7] Wigley G, Pitcher G, Nuglich H, Helie (2008) Fuel Spray Formation and Gasoline Direct Injection AVL eighth. Worldwide Symposium on Combustion Diagnostics, BadenBaden, Germany, 2008

[8] Xu M, Zhang Y, Zeng W, Zhang G, Zhang M (2013) Flash Boiling: Easy and Better Way to Generate Ideal Sprays than the High Injection Pressure. SAE International Journal of Fuels and Lubricants 6:1:137-148

[9] Zhang, G., M. XU, Y. Zhang (2011) Quantitative Measurements of Liquid and Vapor Distributions in Flash Boiling Fuel Sprays utilizing Planar Laser Induced Exciplex Technique. SAE specialized paper 2011-01-1879, 2011

[10] Mittal, M., D.S. Hung, G. Zhu, and H. (2011) Schock, Fuel spray visualization and its impingement analysis on in-cylinder surfaces in a direct-injection spark-ignition engine Journal of Visualization, 14(2): 149-160, 2011

[11] Zeng, W., M. Xu, M. Zhang, (2012) Macroscopic characteristics for direct-injection multi-hole sprays using dimensionless analysis Experimental Thermal and Fluid Science, 40(0): 81-92, 2012.

[12] Zhang, G., M. Xu, Y. Zhang, (2010) Cleary, Macroscopic Characterization of Flash Boiling

Sprays using Laser Induced Exciplex Fluorescence from a Multi-Hole DI Injector. The 14th Annual Conference on Liquid Atomization and Spray Systems- Asia (LASS-Asia 2010), 2010

[13] Chen, H., M. Xu, G. Zhang, (2010) Investigation of Ethanol Spray From Different DI Injectors by Using Two-Dimensional Laser Induced Fluorescence at Potential Cold-Start Condition, ASME Conference Proceedings. 2010, p. 391-403.