

AI-Driven Surface Identification for Enhanced Robotic Perception and Interaction: A Path to Precision and Adaptability

K. Umarani^{1*}, R. Manasa¹, K. Shireesha¹, B. Surendra Vara Prasad¹, M. Hima Bindu¹

¹Department of Computer Science and Engineering, Sree Dattha Group of Institutions, Hyderabad, Telangana, India

Corresponding E-mail: kumaranicse@sreedattha.ac.in

ABSTRACT

In recent years, there has been a surge in the popularity of robotics and AI across various industries. It is crucial to recognize the importance of sensor-equipped robots in various fields such as environmental monitoring, industrial automation, and autonomous navigation. Surface identification is crucial for achieving precision and context-aware robotic actions. Early robotic systems relied on basic sensor data for navigation, often lacking a comprehensive understanding of their surroundings. Creating algorithms to effectively differentiate environmental surfaces for robot-sensed data can be quite challenging. It is important to identify and classify floors, walls, obstructions, and other surfaces. In complex and ever-changing situations, surface recognition accuracy can be affected by factors such as illumination, object orientations, and material fluctuations. Traditional approaches may face challenges in such scenarios. In traditional robot-sensed surface identification systems, rule-based or basic heuristics are utilized. These algorithms are capable of identifying surfaces by analyzing sensor readings and applying either thresholding or predetermined rules. Given the intricacies and diversity of real-world scenarios, these approaches have their limitations. Adapting and generalizing across situations might pose a challenge for them. As the demand for more advanced robotic applications grows, there is an increasing need for surface identification capabilities. AI methods, such as deep learning and neural networks, have the potential to greatly enhance the accuracy and reliability of surface identification for robots. Training models with labeled datasets of diverse surfaces is a crucial aspect of surface identification using artificial intelligence. Convolutional neural networks (CNNs) are commonly used for this purpose. With the help of these models, the robot can enhance its surface classification accuracy by automatically extracting crucial properties from sensor data. With the integration of AI technology, surface identification has significantly enhanced the adaptability of robots, resulting in improved navigation and interaction capabilities.

Keywords: Robotics, Artificial intelligence (AI), Sensor-equipped robots, Environmental monitoring, Surface identification, Deep learning, Autonomous navigation, Industrial automation.

1. INTRODUCTION

Robotics and Artificial Intelligence (AI) have experienced significant growth and adoption across various industries in recent years. Sensor-equipped robots play a crucial role in tasks such as environmental monitoring, industrial automation, and autonomous navigation. A key requirement for these robots to perform precise and context-aware actions is the ability to accurately identify surfaces in their environment. This capability allows robots to navigate effectively and interact with their surroundings in a meaningful way. Early robotic systems relied on rudimentary sensor data for navigation, often with limited environmental awareness. These systems struggled to accurately distinguish between different environmental surfaces, such as floors, walls, and obstructions. Traditional approaches to surface identification typically involved rule-based or heuristic methods, which used sensor readings and predetermined rules to classify surfaces. However, these methods

were limited in their ability to adapt to complex and dynamic environments, where factors such as illumination, object orientations, and material fluctuations could affect surface recognition accuracy.

In India, the adoption of robotics and AI technologies is steadily increasing across various sectors, including manufacturing, healthcare, agriculture, and logistics. According to a report by the International Data Corporation (IDC), spending on robotics and related services in India is expected to reach \$50.9 billion by 2023. This growth is driven by factors such as increasing automation in industries, the rise of smart cities, and the government's initiatives to promote technology adoption. Moreover, the Indian government's "Make in India" initiative, which aims to boost domestic manufacturing and promote innovation, is expected to further drive the adoption of robotics and AI technologies in the country. In sectors such as manufacturing and agriculture, robotics and AI are increasingly being used to improve efficiency, productivity, and safety. However, despite the growing adoption of robotics and AI in India, there are still challenges to be addressed, including the need for skilled workforce, infrastructure development, and regulatory frameworks. Additionally, there is a growing focus on leveraging robotics and AI technologies to address social and environmental challenges, such as healthcare delivery, disaster response, and environmental monitoring.

Given the increasing demand for advanced robotic applications in India and globally, there is a need for more robust and accurate surface identification capabilities. AI methods, particularly deep learning and neural networks, offer promising solutions to enhance surface identification accuracy and robustness in robotic systems. By training models such as convolutional neural networks (CNNs) using labeled datasets of diverse surfaces, robots can learn to automatically extract essential properties from sensor data, enabling more accurate surface classification and improving adaptability in various environments. This research aims to contribute to the advancement of robotic perception by leveraging AI-driven surface identification techniques. By improving the ability of robots to accurately identify and classify surfaces in their environment, this research can enable more precise and context-aware robotic actions, leading to improved performance and efficiency in various applications.

2. LITERATURE SURVEY

Robots can sense, plan, and act. They are equipped with sensors that go beyond human capabilities! From exploring the surface of Mars to lightning-fast global deliveries, robots can do things humans can only dream of. When designing and building robots, engineers often use fascinating animal and human models to help decide which sensors they need. For instance, bats can be used as a model for sound-detecting robots, ants can be used as a model to determine smell, and bees can be used as a model to determine how they use pheromones to call for help.

Human touch helps us to sense various features of our environment, such as texture, temperature, and pressure. Similarly, tactile sensors in robots can detect these qualities and more. For instance, the robot vacuum cleaner (Roomba) uses sensors to detect objects through contact [7]. However, similar to sight and sound, a robot may not always know the precise content of what it picks up (a bag, a soft cake, or a hug from a friend); it just knows that there is an obstacle to be avoided or found.

Tactile sensing is a crucial element of intelligent robotic manipulation as it allows robots to interact with physical objects in ways that other sensors cannot [8]. This article provides a comprehensive overview of tactile sensing in intelligent robotic manipulation, including its history, common issues, applications, advantages, and disadvantages. It also includes a review of sensor hardware and delves into the major topics related to understanding and manipulation.

Robots are increasingly being used in various applications, including industrial, military, and healthcare. One of the most important features of robots is their ability to detect and respond to environmental changes. Odor-sensing technology is a key component of this capability. In a survey presented by [9], the current status of chemical sensing as a sensory modality for mobile robots was reviewed. The article evaluates various techniques that are available for detecting chemicals and how they can be used to control the motion of a robot. Additionally, it discusses the importance of controlling and measuring airflow close to the sensor to infer useful information from readings of chemical concentration.

Robot vision is an emerging technology that uses cameras and sensors to allow robots to interpret and respond to their environment, with numerous applications in the medical, industrial, and entertainment fields. It requires artificial intelligence (AI) techniques to produce devices that can interact with the physical world, and the accuracy of these devices depends on the vision techniques used. A survey by [10] presents a summary of data processing and domain-based data processing, evaluating various robot vision techniques, tools, and methodologies.

Robot sensors and ears detect EM waves. The sound waves heard by human ears can also be detected by some robot sensors, such as microphones. Other robot sensors can detect waves beyond our capabilities, such as ultrasound. Cloud-based speech recognition systems use AI to interpret a user's voice and convert it into text or commands, enable robots to interact with humans in a more natural way, automate certain tasks, and are hosted on the cloud for increased reliability and cost-effectiveness [11]. We examined the potential of utilizing smart speakers to facilitate communication in human-robot interaction (HRI) scenarios.

For the past decade, robotics research has focused on developing robots with cognitive skills and the ability to act and interact with people in complex and unconstrained environments. To achieve this, robots must be capable of safely navigating and manipulating objects, as well as understanding human speech. However, in typical real-world scenarios, individuals who are speaking are often located at a distance, posing challenges for the robot's microphone signals to capture the speech [12]. Researchers have addressed this challenge by working on enabling humanoid robots to accurately detect and locate both visible and audible people. Their focus has been on combining vision and hearing to recognize human activity.

The sense of taste is the most challenging sense to replicate in the structure of robots. A lot of research has been conducted on this subject, but a definitive solution has not yet been reached. The human tongue, despite its small size, is highly complex, with different parts responsible for perceiving different flavors—bitter, sour, and salty—which adds to the difficulty of electronically reproducing the tongue. However, robots can now have a sense of taste. They can be programmed to detect flavors and distinguish between different tastes. This is used in the food industry to ensure that food products meet the required quality standards [13]. The study presented a review of an e-tongue, a powerful tool for detecting and discriminating among tastes and flavors. It consists of a sensor array composed of several types of sensors, each sensitive to a different taste. By analyzing the output of these sensors, the electronic tongue can detect and differentiate between various tastes and flavors. Additionally, the electronic tongue can measure the concentration of a specific substance in a sample, as well as its bitterness and sweetness.

The Sixth Sense is a revolutionary new technology that can help to bridge the gap between humans and machines. It uses advanced artificial intelligence to recognize and respond to the user's environment and surroundings. This technology can be used to create a more personal and interactive experience with machines, making them more human-like and helping to improve the overall user experience. The potential applications of this technology are endless, and it is sure to revolutionize

how humans interact with machines and technology [14]. The researchers developed a gesture-controlled robot with an Arduino microcontroller and a smartphone. It uses a combination of hand gestures and voice commands to allow for a more intuitive way of controlling robots. With this technology, robots can be given complex commands with a few simple gestures.

3. PROPOSED SYSTEM

The machine learning workflow for classifying robot sensing data involves several key steps. Initially, raw data collected from the robot's sensors is pre-processed by filling missing values with 0 and converting categorical data into numerical form using label encoding. The dataset is then split into training and testing sets. A Random Forest classifier and a Decision Tree model are trained on the training data. Their performance is evaluated on the test set using metrics like accuracy, precision, recall, F1-score, and confusion matrix. Finally, the trained models are used to make predictions on new, unseen test data, ensuring the models' applicability to real-world scenarios. This structured approach ensures the development of robust and accurate machine learning models for robotic applications.

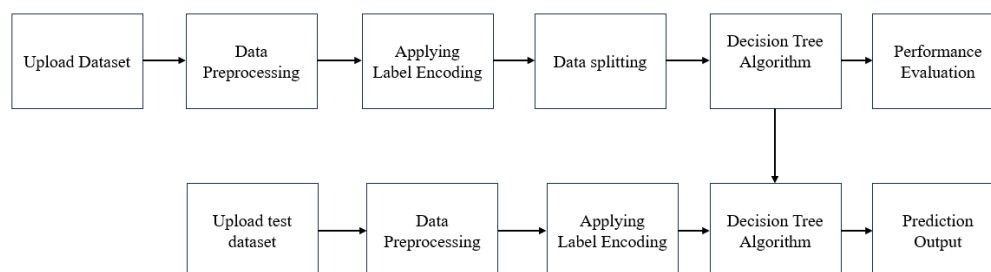


Fig. 1: Block diagram of proposed diagram.

Step 1: Robot Sensing Data: The first step in our machine learning pipeline is acquiring the data, which in this scenario comes from a robot's sensors. Robots equipped with various sensors collect diverse types of data, such as temperature, pressure, proximity, and visual information. This raw data is often complex and requires considerable preprocessing before it can be used effectively for machine learning tasks.

Step 2: Preprocess the Dataset: Preprocessing the dataset is crucial for improving the quality and reliability of the data fed into machine learning models. This step involves several sub-tasks:

- Handling Missing Values: Missing values in the dataset can lead to inaccurate models. One common strategy is to fill these missing values with 0. This simple imputation method is effective when missing values are sparse and randomly distributed.
- Label Encoding: Object-type (categorical) columns, such as strings, need to be converted into numerical values to be processed by machine learning algorithms. Label encoding transforms these categorical values into integers. For instance, if a column contains the categories 'red', 'green', and 'blue', label encoding would convert these to 0, 1, and 2, respectively.

Step 3: Data Splitting: Once the dataset is pre-processed, the next step is to split it into training and testing subsets. Typically, this is done using an 80-20 split, where 80% of the data is used for training the model, and the remaining 20% is reserved for testing. This split allows us to evaluate how well our model performs on unseen data, ensuring that the model generalizes well and is not overfitting to the training data.

Step 4: Random Forest Classifier Training: Random Forest is an ensemble learning method that operates by constructing multiple decision trees during training time and outputting the mode of the classes for classification. It is robust against overfitting and performs well with large datasets. Training a Random Forest classifier involves the following steps:

- Bootstrap Sampling: Random subsets of the data are created with replacement.
- Building Trees: For each subset, a decision tree is built to its full depth, or until it meets specific stopping criteria.
- Aggregating Results: The final prediction is made by aggregating the predictions of all individual trees, typically through majority voting.

Step 5: Decision Tree Model Training: A Decision Tree is a simple, yet powerful, model that splits the data into branches based on feature values. It aims to partition the data such that each branch ends in a leaf node representing a class label. Training a Decision Tree involves:

- Selecting the Best Splits: At each node, the best split is chosen based on a criterion like Gini impurity or Information Gain, aiming to maximize the separation of classes.
- Recursion: This process is recursively applied to each branch until a stopping condition is met (e.g., a maximum tree depth or a minimum number of samples per leaf).
- Pruning: Optional post-processing can be applied to remove branches that add little predictive power to prevent overfitting.

Step 6: Performance Evaluation for Both Classifiers

- After training the models, their performance is evaluated using the test dataset. Common metrics include:
- Accuracy: The proportion of correctly classified instances out of the total instances.
- Precision, Recall, and F1-Score: These metrics are particularly useful in imbalanced datasets, where one class might be more frequent than others. Precision measures the accuracy of positive predictions, recall measures the ability to find all positive instances, and the F1-score is the harmonic mean of precision and recall.
- Confusion Matrix: A table that summarizes the performance of a classification algorithm, showing the true positive, false positive, true negative, and false negative counts.

Step 7: Prediction Using New Test Data: The final step involves using the trained models to make predictions on new, unseen data. This data must be pre-processed in the same manner as the training data (e.g., handling missing values and label encoding). Once pre-processed, the new data is fed into the trained classifiers, which then provide predictions. These predictions can be used for various applications, such as guiding a robot's actions which is surface identification.

4. RESULTS AND DISCUSSION

Figure 2 presents a visual representation, such as a count plot, illustrating the distribution of anomaly categories within the loaded dataset. Figure 3 presents the Receiver Operating Characteristic (ROC) curve for the Random Forest Classifier, providing insights into its true positive rate versus false positive rate across different thresholds. Figure 4 illustrates the ROC curve, but for the Decision Tree Classifier, allowing users to compare the classification performance of different models. Figure 5 provides a side-by-side comparison of performance metrics between the Random Forest Classifier and the Decision Tree Classifier, enabling users to make informed decisions about model selection. Figure 6 shows the results of the model predictions on a test dataset within the GUI, allowing users to visualize and interpret the model's performance on unseen data.

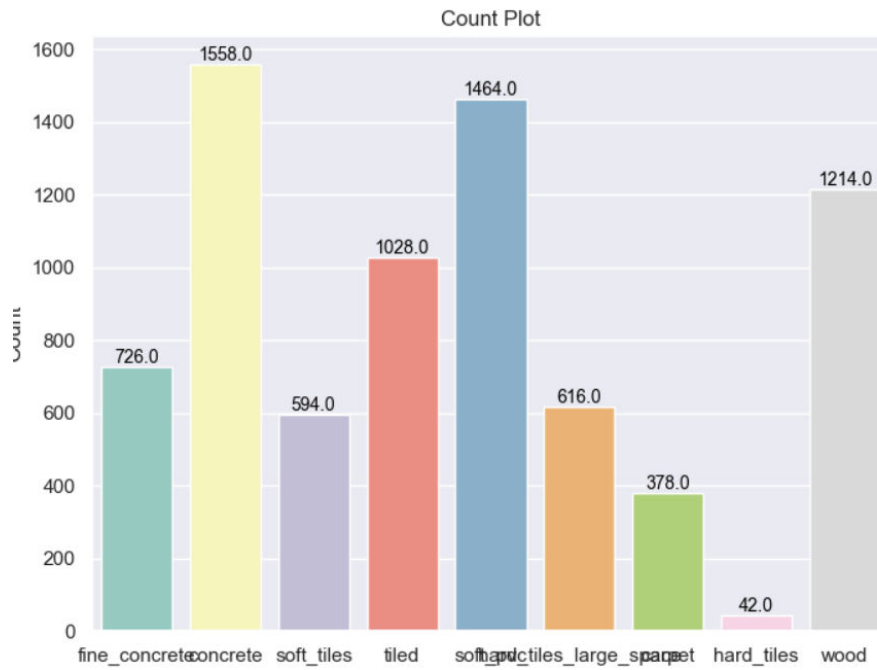


Figure 2: Shows the count plot of floor categories in the dataset.

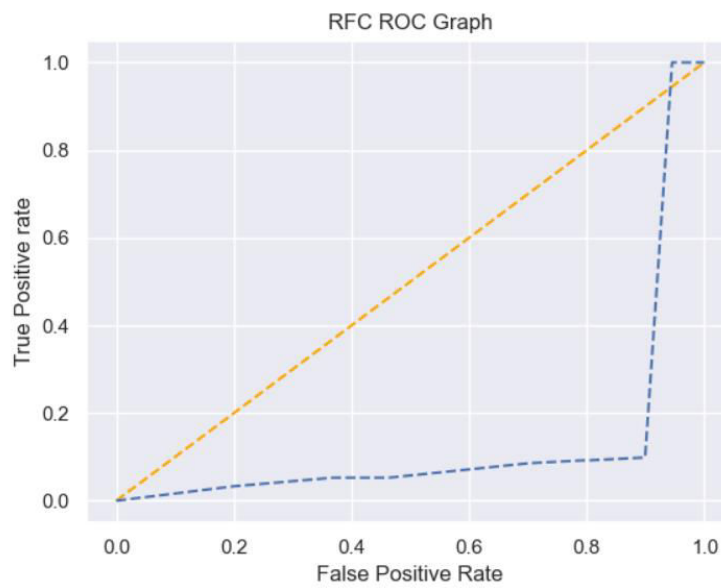


Figure 3: Displays the ROC curve graph for the random forest classifier.

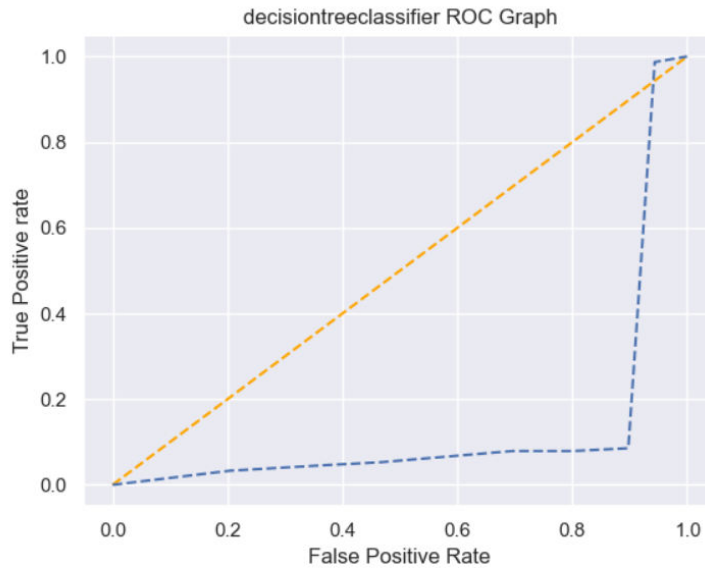


Figure 4: Displays the ROC curve graph for the decision tree classifier

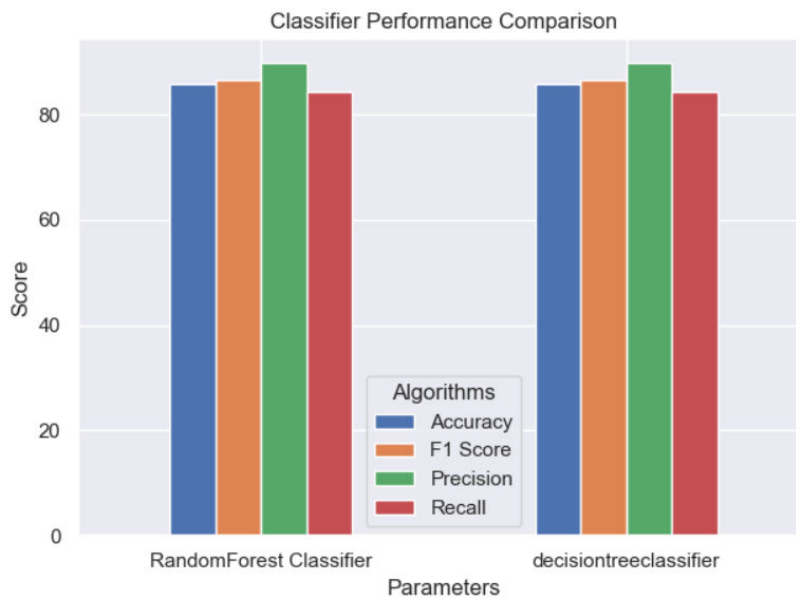


Figure 5: Displays the comparison of performance metrics of the RFC and Decision Tree models.

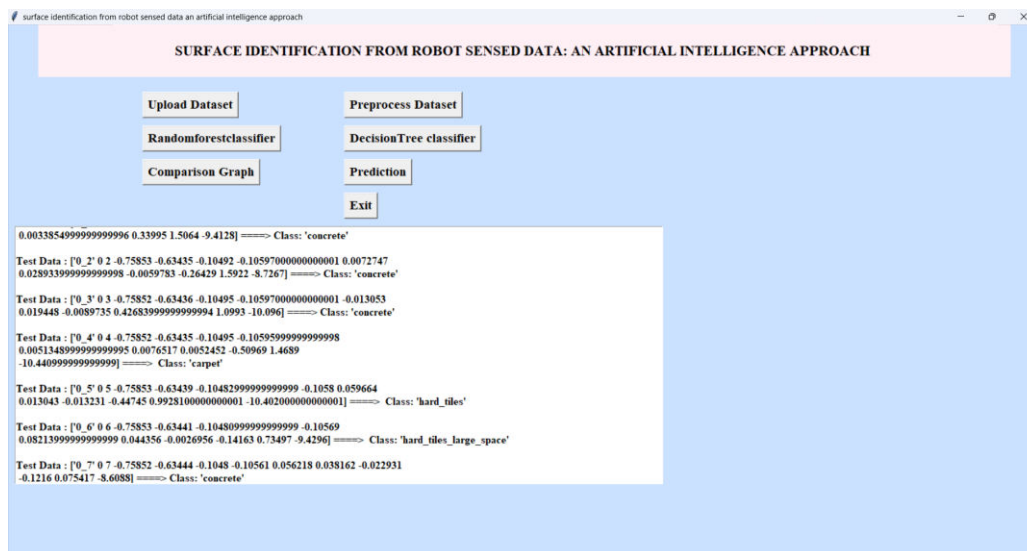


Figure 6: Displays the prediction of test data in GUI.

5. CONCLUSION

In conclusion, the integration of artificial intelligence (AI) into robotic systems holds immense potential to revolutionize surface identification and enhance overall robotic perception and interaction capabilities. By leveraging advanced AI techniques, such as deep learning and convolutional neural networks (CNNs), robots can achieve greater accuracy and robustness in recognizing and classifying diverse environmental surfaces. This advancement opens up new possibilities for precision navigation, context-aware actions, and seamless interaction with the surroundings. The research discussed underscores the importance of AI-driven surface identification in addressing the challenges faced by traditional robotic systems, particularly in complex and dynamic environments. By harnessing the power of AI, robots can adapt more effectively to changing conditions, improve decision-making processes, and ultimately enhance performance across various applications. Furthermore, the findings highlight the significant role that AI-driven surface identification can play in advancing robotics technology in India and globally. As the adoption of robotics and AI continues to grow across industries, the development of more accurate and reliable surface identification capabilities will be crucial for unlocking the full potential of robotic systems.

REFERENCES

- [1] Wang, J.; Gao, Q.; Pan, M.; Fang, Y. Device-Free Wireless Sensing: Challenges, Opportunities, and Applications. *IEEE Netw.* 2018, 32, 132–137
- [2] Zhu, Z.; Hu, H. Robot Learning from Demonstration in Robotic Assembly: A Survey. *Robotics* 2018, 7, 17.
- [3] Yousef, H.; Boukallel, M.; Althoefer, K. Tactile sensing for dexterous in-hand manipulation in robotics—A review. *Sens. Actuators A Phys.* 2011, 167, 171–187.
- [4] Liakos, K.; Busato, P.; Moshou, D.; Pearson, S.; Bochtis, D. Machine Learning in Agriculture: A Review. *Sensors* 2018, 18, 2674.
- [5] Ishida, H.; Wada, Y.; Matsukura, H. Chemical Sensing in Robotic Applications: A Review. *IEEE Sens. J.* 2012, 12, 3163–3173.
- [6] Andrea, C.; Navarro-Alarcon, D. Sensor-Based Control for Collaborative Robots: Fundamentals, Challenges, and Opportunities. *Front. Neurobot.* 2021, 113, 576846.

- [7] Coggins, T.N. More work for Roomba? Domestic robots, housework and the production of privacy. *Prometheus* 2022, 38, 98–112.
- [8] Blanes, C.; Ortiz, C.; Mellado, M.; Beltrán, P. Assessment of eggplant firmness with accelerometers on a pneumatic robot gripper. *Comput. Electron. Agric.* 2015, 113, 44–50.
- [9] Russell, R.A. Survey of Robotic Applications for Odor-Sensing Technology. *Int. J. Robot. Res.* 2001, 20, 144–162.
- [10] Deshmukh, A. Survey Paper on Stereo-Vision Based Object Finding Robot. *Int. J. Res. Appl. Sci. Eng. Technol.* 2017, 5, 2100–2103.
- [11] Deuerlein, C.; Langer, M.; Seßner, J.; Heß, P.; Franke, J. Human-robot-interaction using cloud-based speech recognition systems. *Procedia Cirp* 2021, 97, 130–135.
- [12] Alameda-Pineda, X.; Horaud, R. Vision-guided robot hearing. *Int. J. Robot. Res.* 2014, 34, 437–456.
- [13] Tan, J.; Xu, J. Applications of electronic nose (e-nose) and electronic tongue (e-tongue) in food quality-related properties determination: A review. *Artif. Intell. Agric.* 2020, 4, 104–115.
- [14] Chanda, P.; Mukherjee, P.K.; Modak, S.; Nath, A. Gesture controlled robot using Arduino and android. *Int. J.* 2016, 6, 227–234.