

FISH DISEASE DETECTION USING IMAGE BASED ON MACHINE LEARNING IN AQUACULTURE

G. Sreelekha¹, V. Kavya²

¹Assistant Professor, Dept. of MCA, Audisankara College of Engineering and Technology
(AUTONOMOUS), Gudur, AP, India.

²PG Scholar, Dept. of MCA, Audisankara College of Engineering and Technology
(AUTONOMOUS), Gudur, AP, India.

ABSTRACT:

The proposed system is designed for automatic detection and classification of fish diseases in freshwater especially Rangamati Kaptai Lake and Sunamganj Hoar area of Bangladesh. Our experimental result is indicating that the proposed approach is significantly an accurate and automatic detection and recognition of fish diseases. This study presents fish disease detection based on the K-means and C-means fuzzy logic clustering method to segment the filtering image. Gabor's Filters and Gray Level Co-occurrence Matrix (GLCM) are used to extract the features from the segmented regions. Finally Multi- Support Vector Machine (M-SVMs) is used for classification of the test image. The proposed system demonstrated a comparison between K-means clustering and C-means fuzzy logic. The proposed methodology gave 96.48% accuracy using K-means and 97.90% using C-means fuzzy logic which is the highest accuracy rate to compare other existing methods.

The proposed system has been experimented in the MATLAB environment on infected fish images of Rangamati Kaptai Lake and Sumangan Hoar area. It is a challenging task of fisheries farming in Hoar areas and Lake Areas to detect fish diseases initially. The proposed methodology can detect and classify different fish diseases in early stages and also contributes to improved results for fish disease detection.

I. INTRODUCTION

Fisheries play a vital role in social and economic development and deserve the potential for future development in Bangladesh's agricultural economy. This sector represents one of the most prolific and energetic sectors in Bangladesh. It subsidizes 3.65% of the national GDP and approximately one-fourth (23.81%) of the GDP. Bangladesh is considered as one of the most suitable countries in the world for freshwater rural fisheries because of its resources and agro-climatic condition [1]. Fisheries and aquaculture paid 25% of agricultural

GDP and 4.4% of national GDP in 2012 [1]. Fish biodiversity of the Rangamati Kaptai Lake and the Sunamganj Hoar area is decreasing day by day, due to territory deprivation and different man-made causes. It also worsens the normal health condition of fish and causes death of the fishes which results in great economic loss. Early detection of infected fish is a necessary step in preventing the spread of the disease. This paper recognizes and identifies the different fish diseases of Rangamati Kaptai Lake and Sunamganj Hoar which impacts the control of disease and maintenance of a strong relationship between living creatures, and the environment of Rangamati and Sunamganj. The prosperity of a fish culture depends on its precise regulation, fish life time, and cultural environment. However, unexpected use of feed and fertilizer are the main reasons of failures in fish production. Traditional and semi-intensive culture systems are also responsible for the fish disease. Therefore, the search for a more efficient, less expensive, and more accurate method of diagnosing fish disease cases is very important [2]. In this research, we conducted the identification of local freshwater fish using a software based approach. This research also approaches a method for different fish disease detection. Firstly, the pre-processing stage applied on the test image. In the pre-processing stage, the test image is resized [3] then RGB images converted into HIS. The noise filtering technique is also used to remove noise. In the second stage, K-

means and C-means fuzzy logic clustering method applied to segment the filtering image. In the third stage, the system extracts the features from the segmented and infected regions using Gabor's Filters and GLCM. In the fourth stage, classification of the test image is done by Multi SVMs algorithm. The proposed system is tested using different types of fish diseases, especially Tail and Fin Rot, EUS, Red spot, Bacterial gill rot, Parasitic Disease (Argulus), Broken Antennae, and Rostrum. Finally, fish diseases are detected and recognized that can be prescribed in its early stages [4].

This research is designed in six sections. Section II represents some related works and Section III describes the data collection process. Section IV gives a detailed description of the proposed methodology. Section V briefing the experimental results and discussing about the mentioned method and outcomes of the system. Section VI presents conclusions and the opportunity of probable coming work in this area.

II. RELATED WORKS

Some related works associated with the proposed method described here. Waleed, Ahmed, et al. [5] completed a survey on automatic recognition of different fish diseases. They proposed three several categories of fish diseases named Columnaries, Ichthyophthirius (Ich) and Epizootic ulcerative syndrome (EUS) to recognize and identify

automatically. They show the effect of several color spaces on CNN ultimate execution using Alexnet. Chacon, Mario I., Luis Aguilar, and Abdi Delgado [6] proposed a method related to an optional defuzzification function, fuzzy operators and an image fuzzification function. The Contextuality of the system is described in three phases, geometric measurements, edge detection and image binarization. On binarization the fuzzy method describes the way to solve indeterminacy on the classification of pixels. The fuzzy edge detection showed how a particular perception could be demonstrated by a fuzzy system. Lastly, fuzzy geometry is an illustration of how to obtain a variable state below of lighting to gather more consistent measurements. Mohanaiah, P., P. Sathyanarayana, and L. GuruKumar [7] proposed a method that applies GLCM to extract second order statistical texture features. The Four features namely, Inverse Difference Moment, Correlation, Angular Second Moment and Entropy are computed using Xilinx FPGA. The image compression time can be diminished significantly by extracting the features of an image. These features are important in the motion approximation of videos and in real time pattern identification applications. Li, Wei, and Qian Du [8] proposed a system that showed the importance of extracted features using a simple Gabor filter for the NRS classifier. The accuracy of the experimented classifier results compared to conventional pixel-

wise classifiers. Specifically, to extract spatial features in the PCA projected domain or a subset of original bands with band selection, a simple two dimensional Gabor filter was implemented. Traditional classifiers, such as SVM, RLDA and SRC compared with applied classification techniques, i.e., PC-Gabor-NRS and BS-Gabor-NRS. Authors claimed that Experimental results can outperform other classification techniques. Lyubchenko, Valentin, et al. [9] proposed a color based image segmentation by determining the infected areas so that it can detect and diagnose fish diseases. To detect infected and healthy areas of the fish body, they used digital image processing and colored markers. Malik, Shaveta, Tapas Kumar, and A. K. Sahoo [4] proposed a method to segment and classify EUS and Non-EUS infected fish diseases. To enhance the image, they applied segmentation. Again, they collect useful information using different edge detection methods and also applied morphological operation. They used various feature descriptors to extract features to classify the fish disease using PCA. Sankar, M. Muni, et al. [10] proposed an approach to investigate diseased fish using image processing techniques. They applied capturing image sensing techniques for image acquisition and k-means clustering method. They also used edge detection techniques to detect edges and K-means clustering algorithm to cluster the input prawn image and detect diseases.

Community Based Resource Management Project (CBRMP). Different types of diseases and symptoms are described in Table I. After collecting different types of fishes from Rangamati Kaptai Lake and Sunamganj Haor, we created a database which was uploaded to kaggle.com [11]. We used different types of fish diseases and symptoms of the diseases in our database. In our study, we also used 126 fish species from 39 families initiated in the Sunamganj Haor area [9].

III. PROPOSED METHODOLOGY

DATA COLLECTION

During the study of the historical 20 endangered fish species, IUCN has been initiating in Kaptai Lake. Among 20 species 16 were found to be available, 4 rarely available and 34 were not available during the study period. Accessibility of three categories of disapprovingly endangered, threatened, and helpless fishes from Kaptai Lake are presented in considering exposed species, 30% were found accessible, 7% rarely available and 63% were not available during the study period. Available fish landing hubs and marketplaces would be helpful to provide primary knowledge of fish fauna, mostly to know about the fish fauna in the biggest artificial Kaptai Lake, Rangamati, Bangladesh.

In this study, Kaptai reservoir and fishery Ghat in Ranga- mati and Sunamganj Haor were selected to collect the different types of freshwater fishes. The

data were also collected through the interview with fishermen, associated persons and cross- check interviews with informers. After that, the collected data were cross-checked with the landing data from Bangladesh Fisheries Development Corporation fish landing center especially Rangamati and Sunamganj, Bangladesh. Several large diverse fisheries are found in Rangamati town and Sunamganj.

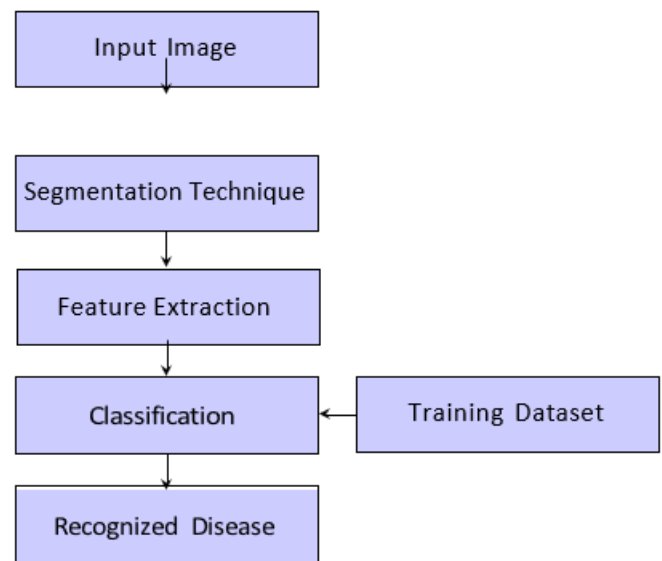


Fig 1: Block Diagram of the Developed System.

A. INPUT IMAGE

The system required a color image to start the procedure. An affected fish image passed as an input to the system.

B. PRE-PROCESSING

Noise Filtering is applied to remove several forms of noises and to filter the redundant information from the images [12]. Contrast Stretching is

compulsory when the system needs to intensify or diminish the total number of pixels.

C. IMAGE SEGMENTATION

Fuzzy C-means (FCM) is a clustering method used to separate data into two or more clusters. We used FCM in our system.

Secondly, the average of median values of each row is calculated. Thirdly, the distance between every pixel of the image and cluster values calculated. Again, the distance between the pixels of the image and averaged medians are measured also. Fourthly, the final fuzzy field smooth's the data obtained from cluster values and from averaged medians. Fifthly, the fuzzy rule is applied to segment the image between two clusters. Sixthly, the segmented region is reconstructed by updating cluster centers. Seventhly, steps third to sixth repeated for t times. The whole process is iteratively performed until the difference between two consecutive clusters reaches to a constant position and becomes minimum [13]. Finally, the segmented regions of both clusters for a test image are found.

K-means clustering is an unsupervised learning algorithm that is used enormously. The method is used to define k samples, one for each cluster [14]. The next step is to assign each point of input data into the nearest cluster. After selecting each data point, the first step is completed by re-calculating the new cluster centroid for the k-clusters. An iterative process has been generated until the new

centroid reaches the constant state. As a result, the data points separate into k clusters step by step.

D. FEATURE EXTRACTION

GLCM and Gabor Filter are used to extract feature vectors from input fish disease image like texture. Texture element is extracted from the RGB colored image. The GLCM functions represent texture features of an image. Textures are the features whose focus on the distinct pixels that create an image. Texture features such as statistical feature is used which contains GLCM, grey level histogram, run length matrices and autocorrelation features for texture extraction. GLCM procedures extract 2nd-order statistical texture features [7]. Textural features include entropy, correlation, contrast, homogeneity and energy. The texture is particularly appropriate for this kind of study because of its possessions. The system also used Gabor filter features. The Gabor filters consist of parameters such as standard deviation, orientation and the radial center frequency [8]. The system combined the GLCM feature and the Gabor Filters into one feature set. This combination of the Gabor filters and the GLCM feature generate a better outcome on the fish texture dataset.

E. CLASSIFICATION USING MULTI-SVMS

The proposed system used multi-SVMs to classify fish diseases. The extracted features of each fish disease image are stocked in the database. The SVM classifier will calculate the feature number of

database images and the feature value of the input image; based on these values the classifier will separate the input image from that category. SVM will compare the test sample feature set to all training samples and select the shortest distance. Support vector machines were initially calculated for binary classification. Several approaches have been proposed where typically the system constructs a multi-class classifier by combining several binary classifiers. The SVM is learned by features given as an input to its training procedure. During training, the SVM identifies the appropriate boundaries in the 2-categories. Features are called according to class associative to a specific class. Using received features, the multi-SVM starts classification steps. The system uses multi-SVM as a two class SVM repeatedly. When the test image is passed to the classifier, it classifies it from the first two classes. After that classified class and a new class used to classify the test image. Similarly, it continued its classification steps until all categories were tested. From this last classification, the test image is classified as the true categorized class [14].

VI. CONCLUSION

The paper proposed an image processing based approach and automatically detects different types of fish diseases. The testing of the proposed system has been experienced on the actual infected fish images collected from Rangamati Kaptai Lake and

Sunamganj Hoar, Bangladesh. The experimental results indicate that the proposed approach is a valuable approach and can significantly support accurate and automatic detection of fish disease and the proposed combination gave better accuracy after applying the machine learning algorithm. The infected fish images were then classified with an average accuracy rate of K-means clustering and C-means fuzzy logic gives 96.48% and 97.90% respectively. In the future, it will present some guidelines such as establishing a better segmentation system, choosing improved classification algorithms and deep learning algorithms that can apply on different feature descriptors.

V. REFERENCES

- [1] FRSS. "Yearbook of Fisheries Statistics of Bangladesh." (2017).
- [2] Austin, Brian. "Methods for the diagnosis of bacterial fish diseases." *Marine Life Science & Technology* 1, no. 1 (2019): 41-49.
- [3] Juel Sikder, Utpol Kanti Das and Rana Jyoti Chakma, "Super-vised Learning-based Cancer Detection" *International Journal of Advanced Computer Science and Applications (IJACSA)*, 12(5),2021.
<http://dx.doi.org/10.14569/IJACSA.2021.01205101>
- [4] Malik, Shaveta, Tapas Kumar, and A. K. Sahoo. "Image processing tech- niques for identification of fish disease." In 2017 IEEE 2nd International

Conference on Signal and Image Processing (ICSIP), pp. 55-59. IEEE, 2017.

[5] Waleed, Ahmed, Hadeer Medhat, Mariam Esmail, Kareem Osama, Radwa Samy, and Taraggy M. Ghanim. "Automatic Recognition of Fish Diseases in Fish Farms." In 2019 14th International Conference on Computer Engineering and Systems (ICCES), pp. 201-206. IEEE, 2019.

[6] Chacon, Mario I., Luis Aguilar, and Abdi Delgado. "Definition and applications of a fuzzy image processing scheme." In Proceedings of 2002 IEEE 10th Digital Signal Processing Workshop, 2002 and the 2nd Signal Processing Education Workshop., pp. 102-107. IEEE, 2002.

[7] Mohanaiah, P., P. Sathyanarayana, and L. GuruKumar. "Image texture feature extraction using GLCM approach." International journal of scientific and research publications 3, no. 5 (2013): 1-5.

[8] Li, Wei, and Qian Du. "Gabor filtering based nearest regularized subspace for hyperspectral image classification." IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing 7, no. 4 (2014): 1012-1022.

[9] Lyubchenko, Valentin, Rami Matarneh, Oleg Kobylin, and Vyacheslav Lyashenko. "Digital image processing techniques for detection and diagnosis of fish diseases." (2016).

[10] Sankar, M. Muni, CH Nageswar Rao, G. Sailaja, N. Bhuvaneshwary, and P. Gunasekhar. "White spot syndrome virus detection in shrimp images using image segmentation techniques." International Journal of Advanced Research in Computer Science and Software Engineering 3, no. 9 (2013).

[11] Mahmud, Tanjim, Juel Sikder, Rana Jyoti Chakma, and Jannat Far- doush. "Fabric Defect Detection System." In International Conference on Intelligent Computing & Optimization, pp. 788-800. Springer, Cham, 2020.

[12] Christ, MC Jobin, and R. M. S. Parvathi. "Fuzzy c-means algorithm for medical image segmentation." In 2011 3rd International Conference on Electronics Computer Technology, vol. 4, pp. 33-36. IEEE, 2011.

[13] Sikder, Juel, Utpol Kanti Das, and AM Shahed Anwar. "Cancer Cell Segmentation Based on Unsupervised Clustering and Deep Learning." In International Conference on Intelligent Computing & Optimization, pp. 607-620. Springer, Cham, 2020.

AUTHOR'S PROFILE

G. SREELEKHA currently working as Assistant Professor in Audisankara College of Engineering and Technology (AUTONOMOUS), NH-5, Bypass Road, Gudur, Tirupati (Dt.), Andhra Pradesh, India.



V. KAVYA is pursuing MCA from Audisankara College of Engineering and Technology (AUTONOMOUS), NH-5, Bypass Road, Gudur, Tirupati (Dt.), Andhra Pradesh, India.